



BELMONT
TRAILERS™



GOOSENECK TRAILERS





GOOSENECK DECKOVER

When the job calls for strength, stability, and hauling power, Belmont Gooseneck Trailers deliver.

Designed for contractors, haulers, and operators who can't afford to cut corners, Belmont Goosenecks combine rugged construction with intelligent features to handle the heaviest loads and the toughest conditions. With models ranging from general-duty to heavy-duty hydraulic dovetails, Belmont trailers are built to perform, built to last, and built to take it.


Every Belmont Gooseneck Trailer is designed with professional-grade performance in mind. From our standard dual-wheel deckcovers to our advanced hydraulic dovetail models, we offer trailer solutions for a wide range of applications, industries, and payload requirements.

GOOSENECK TRAILERS ARE AVAILABLE IN THESE SERIES:

**HEAVY DUTY GOOSENECK
ENGINEERED BEAM GOOSENECK
HYDRAULIC DOVETAIL GOOSENECK**

HEAVY DUTY GOOSENECK

This hardworking model is ideal for contractors and equipment haulers who need reliable strength and straightforward functionality. Engineered with a 12" I-beam frame, pierced construction, and self-cleaning beavertail ramps, it's everything you need in a daily-use workhorse.

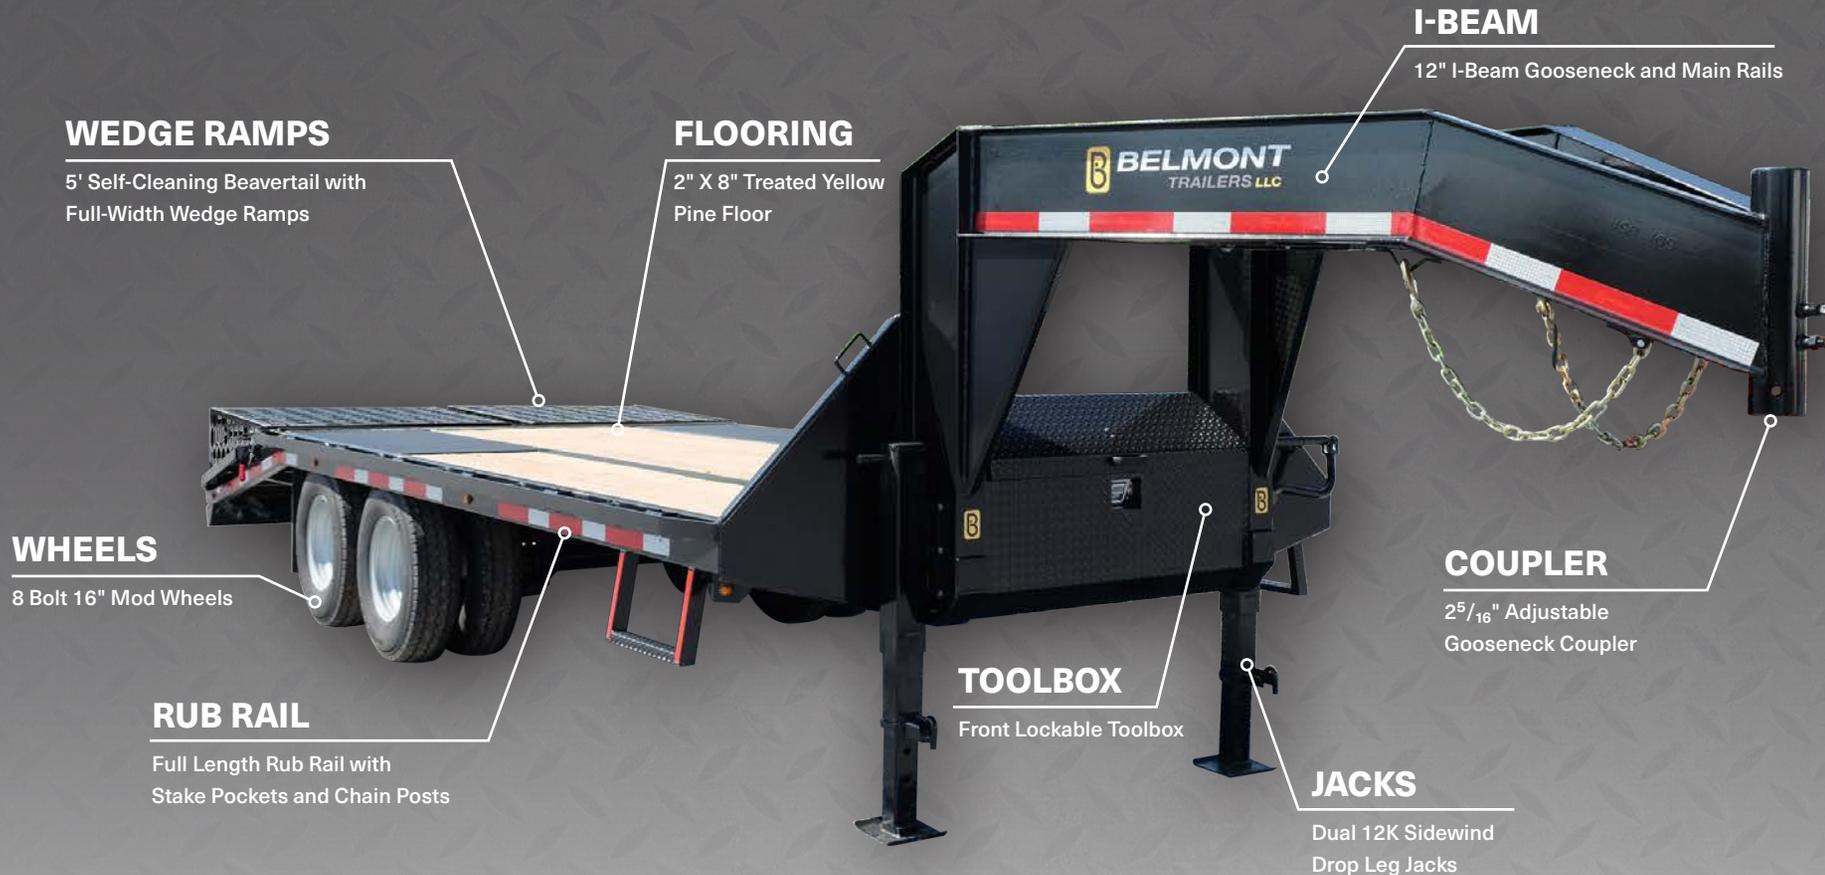

*GN20-20K Dual Wheel Gooseneck Deckover Trailer
in Charcoal with standard and optional features*

FEATURES & OPTIONS



HEAVY DUTY GOOSENECK



GN20K/GN24K



Model	GVWR	Empty Weight	Payload	Axles	Bed Height	Bed Size	Overall Size
GN20-20K	20000	5475	14525	(2) 10K GD Oil Bath	35"	96" x 15'+5'	102" x 28' 2"
GN25-20K	20000	6050	13950	(2) 10K GD Oil Bath	35"	96" x 20'+5'	102" x 33' 2"
GN30-20K	20000	6550	13450	(2) 10K GD Oil Bath	35"	96" x 25'+5'	102" x 38' 2"
GN35-20K	20000	7100	12900	(2) 10K GD Oil Bath	35"	96" x 30'+5'	102" x 43' 2"

Model	GVWR	Empty Weight	Payload	Axles	Bed Height	Bed Size	Overall Size
GN25-24K	24000	6900	17100	(2) 12K HD Oil Bath	35"	96" x 20'+5'	102" x 33' 2"
GN30-24K	24000	7100	16900	(2) 12K HD Oil Bath	35"	96" x 25'+5'	102" x 38' 2"
GN35-24K	24000	7415	16585	(2) 12K HD Oil Bath	35"	96" x 30'+5'	102" x 43' 2"
GN40-24K	24000	8390	15610	(2) 12K HD Oil Bath	35"	96" x 35'+5'	102" x 48' 2"

GN20K/GN24K STANDARD FEATURES

- 12" I-Beam Gooseneck and Main Rails
- Pierced Frame, 3" Structural I-Beam Cross-Members
- Full Length Rub Rail with Stake Pockets and Chain Posts
- 2" X 8" Treated Yellow Pine Floor
- 5' Self-Cleaning Beavertail with Full-Width Wedge Ramps
- 2⁵/₁₆" Adjustable Gooseneck Coupler
- Removable Zinc Plated Safety Chains with Stow Hooks
- Dual 12K Sidewind Drop Leg Jacks
- High Quality Dexter Oil Bath Axles
- Electric Self Adjusting Brakes
- ST235/85R16 "E" Radial Tires
- 8 Bolt 16" Mod Wheels
- High-Quality Urethane Paint Primer and Top Coat
- Sealed Modular Wiring Harness
- Grommet Mounted LED Lights
- Front Lockable Toolbox
- Spare Tire Mount Inside Gooseneck
- Front Steps

1. 12" I-Beam Gooseneck and Main Rails
2. Front Lockable Toolbox
3. ST235/85R16 "E" Radial Tires
4. 5' Beavertail with Full-Width Wedge Ramps
5. 2⁵/₁₆" Adjustable Gooseneck Coupler

ENGINEERED BEAM GOOSENECK

Built for serious loads and demanding job sites, the HD 24K model offers heavier axles, a reinforced suspension system, and added hauling confidence. With its 12K Dexter axles and 30,000 lb. leaf spring suspension, this trailer is ready to handle equipment, materials, or machinery without compromise.



GNX Dual Wheel Gooseneck Deckover HD 24k shown in hunter green with standard and optional features

FEATURES & OPTIONS



A winch option is available to make your loading experience fast and easy. The winch can be gooseneck- or deck-mounted. A wireless remote option is also available.

The GNX's front lockable full-height roll-up door toolbox is an industry first on gooseneck trailers. The black aluminum door's sleek and stylish appearance complements any trailer color.

Owners that want their trailer to stand out from the crowd may opt to upgrade from the traditional steel wheels to aluminum. All Belmont GXD and GNX trailers come standard with mud flaps.



ENGINEERED BEAM GOOSENECK



GNX24K



Model	GVWR	Empty Weight	Payload	Axles	Bed Height	Bed Size	Overall Size
GNX25	24000	6550	17450	(2) 12K HD Oil Bath	35"	96" x 20'+5'	102" x 34'
GNX28	24000	6800	17200	(2) 12K HD Oil Bath	35"	96" x 23'+5'	102" x 37'
GNX30	24000	7000	17000	(2) 12K HD Oil Bath	35"	96" x 25'+5'	102" x 39'
GNX32	24000	7250	16750	(2) 12K HD Oil Bath	35"	96" x 27'+5'	102" x 41'
GNX35	24000	7590	16410	(2) 12K HD Oil Bath	35"	96" x 30'+5'	102" x 44'
GNX38	24000	7950	16050	(2) 12K HD Oil Bath	35"	96" x 33'+5'	102" x 47'
GNX40	24000	8200	15800	(2) 12K HD Oil Bath	35"	96" x 35'+5'	102" x 49'
GNX44	24000	8700	15300	(2) 12K HD Oil Bath	35"	96" x 39'+5'	102" x 53'

GNX24K STANDARD FEATURES

- 12" 19# I-Beam Gooseneck and Main Rails
- Pierced Frame, 3" Structural I-Beam Cross-Members
- Full Length Rub Rail with Stake Pockets and Chain Posts
- 2" X 8" Treated Yellow Pine Floor
- 5' Self-Cleaning Beavertail with Full-Width Wedge Ramps
- 2⁵/₁₆" Adjustable Gooseneck Coupler
- Removable Zinc Plated Safety Chains with Stow Hooks
- Dual 12K Sidewind Drop Leg Jacks
- 12K Heavy Duty Dexter Oil Bath Axles
- Dexter HDSS 30,000 lb. Leaf Spring Suspension
- Electric Self Adjusting Brakes
- ST235/85R16 "E" Radial Tires
- 8 Bolt 16" Mod Wheels
- High-Quality Urethane Paint Primer and Top Coat
- Sealed Modular Wiring Harness
- Grommet Mounted LED Lights
- Front Lockable Toolbox
- Spare Tire Mount Inside Gooseneck
- Front Steps
- Mud Flaps

1. Full Width Wedge Ramps

2. 2⁵/₁₆" Adjustable Pintle Ring


3. ST235/85R16 Black Mod Tire/Wheel

4. Self Cleaning Beavertail

5. Full-Width Wedge Ramps Latch

HYDRAULIC DOVETAIL GOOSENECK

When time is money, the Hydraulic Dovetail model gives you the edge. With a 12' powered dovetail and 12K HD axles on a 48" spread, this trailer is designed for smooth loading, enhanced stability, and unmatched strength. Perfect for transporting low-clearance equipment or high-value machinery.

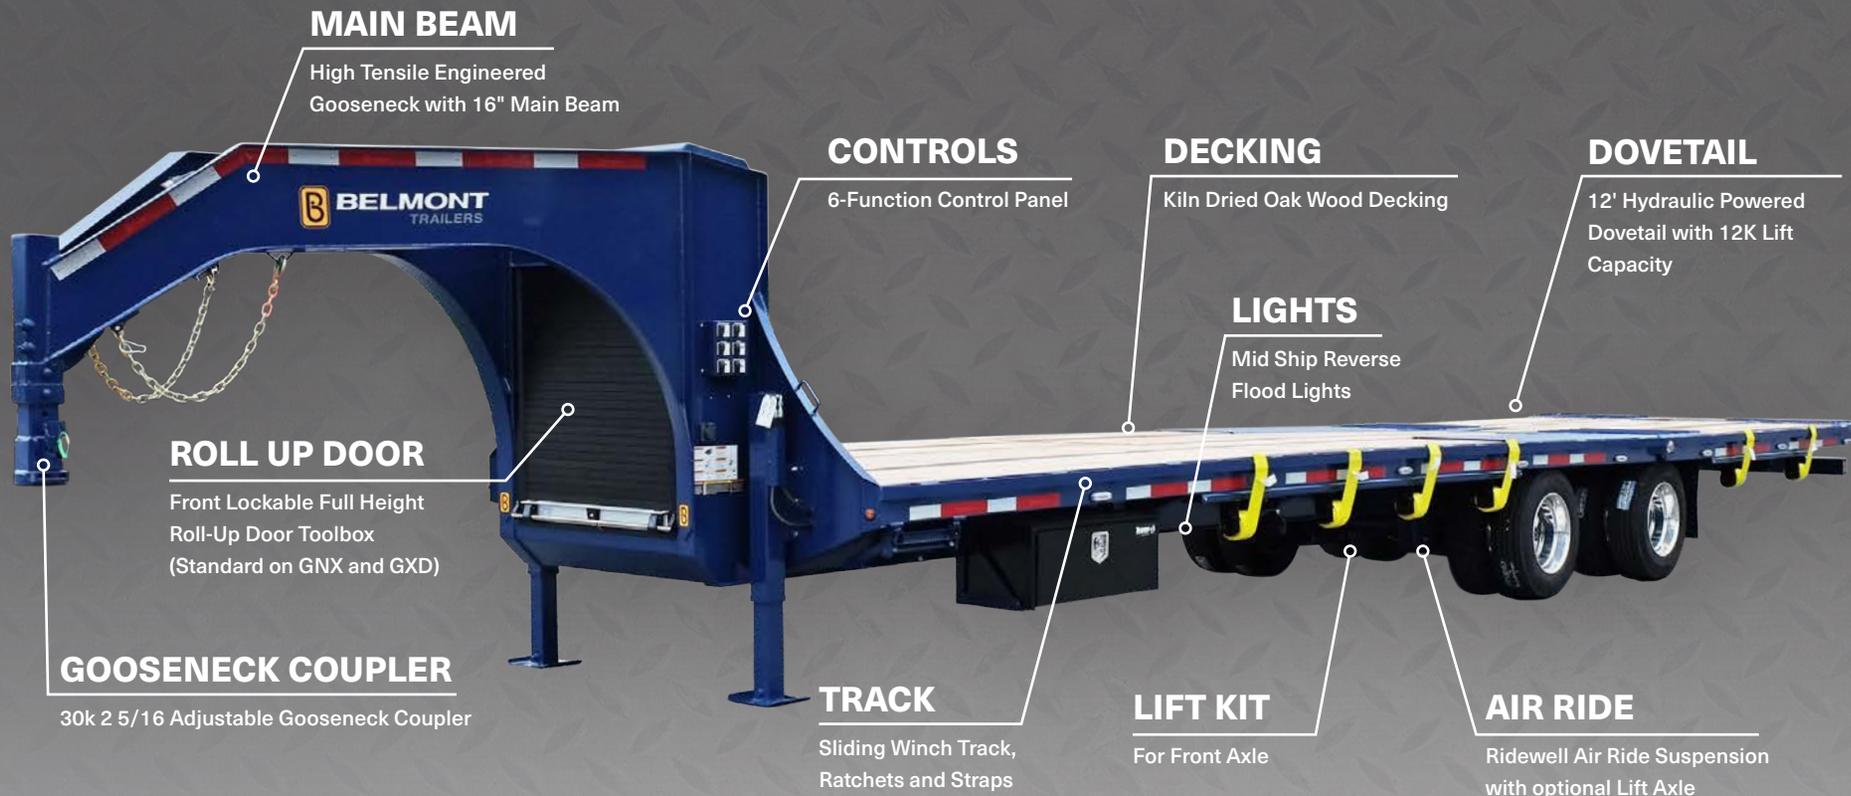

GXD Dual Wheel Gooseneck Deckover HD 24 K Hydraulic Dovetail shown in Sapphire Blue with standard and optional features

FEATURES & OPTIONS



Standard on all GXD trailers, a 16" pierced main beam with 3" structural crossmembers provides greater strength for the heaviest loads while reducing trailer weight.

The front lockable full-height roll-up door toolbox provides endless organizational and storage options with the integrated pegboard system and optional interior lighting.

The Ridewell Air Ride suspension system lets you adjust your suspension to accommodate different road and load conditions, providing a smooth ride for your trailer and cargo. A lift axle option is available.



HYDRAULIC DOVETAIL GOOSENECK







Model	GVWR	Empty Weight	Payload	Axles	Bed Height	Bed Size	Overall Size
GXD32	24000	7680	16320	(2) 12K HD Oil Bath	35"	96" x 20'+12'	102" x 41'
GXD35	24000	8040	15960	(2) 12K HD Oil Bath	35"	96" x 23'+12'	102" x 44'
GXD38	24000	8400	15600	(2) 12K HD Oil Bath	35"	96" x 26'+12'	102" x 47'
GXD40	24000	8640	15360	(2) 12K HD Oil Bath	35"	96" x 28'+12'	102" x 49'
GXD44	24000	9120	14880	(2) 12K HD Oil Bath	35"	96" x 32'+12'	102" x 53'

GXD24K STANDARD FEATURES

- 12' Hydraulic Powered Dovetail with 12,000 lb. Lift Capacity
- High Tensile Engineered Gooseneck and 16" Main Beam
- 12K Heavy Duty Dexter Oil Bath Axles with 48" Spread
- Dexter HDSS 30,000lb. Leaf Spring Suspension
- Cross Tube Torque Control
- Electric Self Adjusting Brakes
- ST235/85R16 Range "E" Radial Tires
- 8 Bolt 16" Black Mod Wheels
- High Quality Urethane Paint Primer and Top Coat
- Pierced Frame, 3" Structural I-Beam Cross-Members
- Full Length Rub Rail with Stake Pockets and Chain Pipes
- Dual 12K Side Wind Drop Leg Jacks
- 2 5/16" Adjustable Gooseneck Coupler
- Removable Zinc Plated Safety Chains with Stow Hooks
- 2 x 8" Treated Yellow Pine Floor
- Sealed Phillips Modular Wiring Harness
- Grommet Mounted LED Lights
- Front Lockable Full Height Roll-Up-Door Toolbox
- Spare Tire Mount Inside Gooseneck
- Front Steps
- Mud Flaps

1. 12Klb Rated 12' Hyd. Powered Dovetail
2. Top of Gooseneck Toolbox
3. 40K Coupler
4. Hydraulic Jack
5. Selector Valve for Jack and Dovetail

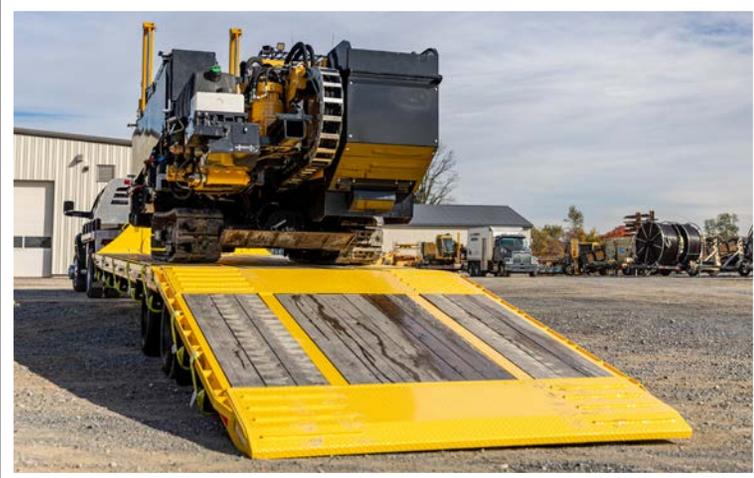

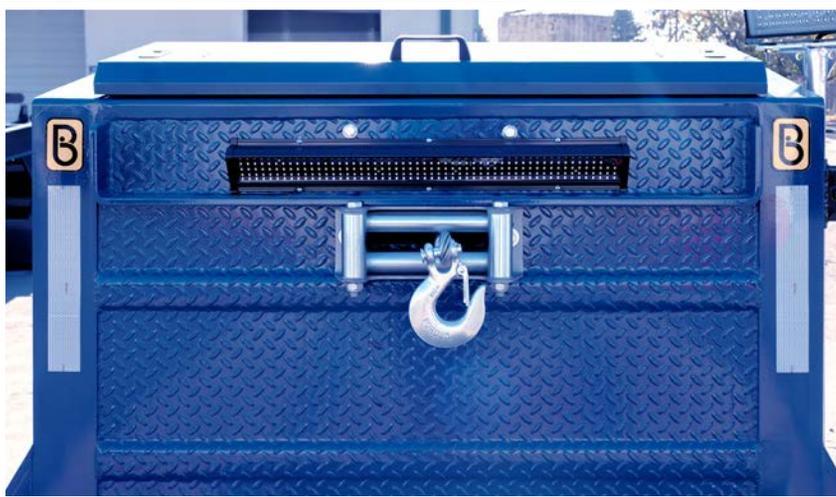

AVAILABLE COLORS




Charcoal
(Standard)



Black
(Standard)



Red



Belmont
Standard
Yellow



Light Gray



Sapphire Blue



White



Hunter Green




Lime Green



Orange



New Cat
Yellow



Galvanized



Sandstone

**colors for representative purposes only,
actual paint may vary*

**other colors available upon request*

FRAME MATRIX

	Length	Main Beam	Cross Members
GN20K	20'	12" 16lb. Beam	3" I-Beam
	25'		
	30'		
	35'		
GN24K	20'	12" 19lb. Beam	3" I-Beam
	25'		
	30'		
	35'		
GNX24K	25'	16" 16lb. Beam	3" I-Beam
	28'		
	30'		
	32'		
	35'		
	38'		
	40'		
44'			

	Length	Main Beam	Cross Members
GNX32K	25'	16" 16lb. Beam	3" I-Beam
	28'		
	30'		
	32'		
	35'		
	38'		
GXD24K	40'	16" 16lb. Beam	3" I-Beam
	44'		
	32'		
	35'		
	38'		
GXD32K	40'	16" 16lb. Beam	3" I-Beam
	44'		
	32'		
	35'		
	38'		

AVAILABLE OPTIONS

GN20K/24K

Axles, Brakes, Suspension

- 16K Axle Upgrade
- 12K Hydraulic Jack Upgrade
- 2-Speed 12K Sidewind Jacks
- Torsion Axle Upgrade
- Hydraulic Disc or Drum Brakes
- Ridewell Air Ride Suspension

Lighting

- LED Ground Illumination Lighting (Each) (Yellow/Red/White)

Winch

- 4" Straps on Sliding Winch Track
- Winch Mount

Decking

- Gooseneck Top Deck

Wheels

- Single Wheel Setup Available
- Spare Tire and Wheel

Other

- D-Rings
- Slide in Steel or Aluminum Ladder Ramps (avail. only on trailers no beavertail)

GNX24K HD

Axles, Brakes, Suspension

- 16K Axle Upgrade
- 12K Electric Jacks
- 12K Hydraulic Jacks
- 12K 2-Speed Jacks
- Torsion Axle Upgrade
- Hydraulic Disc or Drum Brakes
- Ridewell Air Ride Suspension

Lighting

- LED Ground Illumination Lighting (Each) (Yellow/Red/White)
- Gooseneck Mounted Telescopic Flood Light (Includes Light Pole Wiring)
- Additional LED Lights

Winch

- 4" Straps on Sliding Winch Track
- Gooseneck or Deck Winch Mount
- Bumper Pull A-Frame Hitch ILO Gooseneck

Decking

- Deck On Top Of Gooseneck
- Total Flat Deck - No Ramps or Beavertail

Wheels

- Aluminum Wheels/Radial Tires
- Single Wheel Setup Available
- Spare Tire and Wheel
- Underbody Windup Spare Tire Mount

Other

- D-Rings
- Crank Adjustable Gooseneck Coupler
- Hot Dipped Galvanized Finish
- Underbody Mounted Toolboxes

GXD24K HYDRAULIC DOVETAIL

Axles, Brakes, Suspension

- 16K Axle Upgrade
- 12K Electric Jacks
- 12K Hydraulic Jacks
- 12K 2-Speed Jacks
- Torsion Axle Upgrade
- Hydraulic Disc or Drum Brakes
- Ridewell Air Ride Suspension

Lighting

- LED Ground Illumination Lighting (Each) (Yellow/Red/White)
- Gooseneck Mounted Telescopic Flood Light (Includes Light Pole Wiring)
- Additional LED Lights

Winch

- 4" Straps on Sliding Winch Track
- Winch Mount
- Bumper Pull A-Frame Hitch ILO Gooseneck

Decking

- Deck On Top Of Gooseneck
- Frame Mounted Swivel Support Stands (Std. on Adjustable Beavertail)

Wheels

- Aluminum Wheels/Radial Tires
- Single Wheel Setup Available
- Spare Tire and Wheel
- Underbody Windup Spare Tire Mount

Other

- D-Rings
- Crank Adjustable Gooseneck Coupler
- Hot Dipped Galvanized Finish
- Underbody Mounted Toolboxes

DUAL TIRE & WHEEL OPTIONS

	Standard		Upgrade	
	Tire/Wheel Size	Axle Size	Tire/Wheel Size	Axle Size
GN20K	ST235/85R16 E, Silver Mod 16" Dual 865	10K-12K	<ul style="list-style-type: none"> - ST235/85R16 E, Black Mod 16" Dual 865 - ST235/85R16 G, Black Mod 16" Dual 865 - LT215/75R17.5 H, Black Mod 17.5" Dual 865 Single Wheel Options <ul style="list-style-type: none"> - LT235/75R17.5 J, Black Mod 17.5" 865 - LT235/75R17.5 J, Silver Mod 17.5" 865 - LT235/75R17.5 J, Lynx Black Machined Aluminum 17.5" 865 	10K-12K
GN24K	ST235/85R16 E, Silver Mod 16" Dual 865	10K-12K	<ul style="list-style-type: none"> - ST235/85R16 E, Black Mod 16" Dual 865 - ST235/85R16 G, Black Mod 16" Dual 865 - LT215/75R17.5 H, Black Mod 17.5" Dual 865 Single Wheel Options <ul style="list-style-type: none"> - LT235/75R17.5 J, Black Mod 17.5" 865 - LT235/75R17.5 J, Silver Mod 17.5" 865 - LT235/75R17.5 J, Lynx Black Machined Aluminum 17.5" 865 	10K-12K
GNX24K	ST235/85R16 E, Black Mod 16" Dual 865	10K-12K	<ul style="list-style-type: none"> - ST235/85R16 E, Aluminum Mod 16" Dual 865 - ST235/85R16 H, Black Mod 16" Dual 865 - LT235/75R17.5 J, Black Mod 17.5" 865 - LT235/75R17.5 J, Black Machined Aluminum 17.5" 865 - LT215/75R17.5 J, Black Mod 17.5" Dual 865 Silver Mod Option	10K-12K
GNX30K	LT215/75R17.5 H, Black Mod 17.5" Dual 8 on 275	16K	<ul style="list-style-type: none"> - LT215/75R17.5 H, Aluminum Alcoa 17.5" Dual 8 on 275 - LT215/75R17.5, H, 8H-10.8, Dual Aluminum 	16K
GXD24K	ST235/85R16 E, Black Mod 16" Dual 865	10K-12K	<ul style="list-style-type: none"> - ST235/85R16 E, Aluminum Mod 16" Dual 865 - ST235/85R16 H, Black Mod 16" Dual 865 - ST235/85R16 H, Black Mod 16" Dual 865 - LT235/75R17.5 J, Silver Mod 17.5" 865 - LT235/75R17.5 J, Black Mod 17.5" 865 - LT235/75R17.5 J, Black Machined Aluminum 17.5" 865 - LT215/75R17.5 J, Black Mod 17.5" Dual 865 	10K-12K
GXD32K	LT215/75R17.5 H, Black Mod 17.5" Dual 8 on 275	16K	<ul style="list-style-type: none"> - LT215/75R17.5 H, Aluminum Alcoa 17.5" Dual 8 on 275 	16K

BELMONT PRODUCTS

Belmont produces trailers of all types: Utility, Landscape, Enclosed, Dump, Deckover, and Gooseneck.
Visit the Belmont website to see the full line of products.



ABOUT BELMONT TRAILERS

Belmont Trailers is a family-owned business located in the heart of Lancaster County, Pennsylvania.

With over 20 years of experience building trailers, Belmont is dedicated to delivering quality solutions that set the benchmark for excellence in the trailer industry. Belmont's skilled and dedicated team works hard to build trailers that will hold up for years to come.

We also stand behind our trailers with one of the best warranties in the industry.



PARTNER WITH BELMONT

Choosing Belmont Trailers means more than just buying a trailer- it means having a team that's committed to your satisfaction long after the sale. With reliable customer support and a wide range of customizable options, we're here to make sure you get exactly what you need, when you need it. At Belmont, we treat our customers like family- and we're ready to provide a trailer that's Built To Take It, just like you.



Give us a call at 800-380-2404, or scan the QR to find out more





BELMONT
TRAILERS™

BUILT TO TAKE IT



Belmont Trailers

40 Hess Rd, Leola, PA 17540

800-380-2404

www.belmonttrailers.com